

# Stabilization of linear switched DAEs via switching signal

**Andrii Mironchenko**<sup>1</sup> Fabian Wirth<sup>1</sup> Kai Wulff<sup>2</sup>

<sup>1</sup>Institut für Mathematik  
Universität Würzburg

<sup>2</sup>Institut für Automatisierungs- und Systemtechnik  
Technische Universität Ilmenau

März 04, 2013  
Deskriptor 2013

- 1 Preliminaries
- 2 Approximation of switched DAEs by switched ODEs
- 3 Special cases
  - Stabilization via Projections
  - The case of commutative flow maps

Consider a regular DAE

$$E\dot{x} = Ax, \quad (1)$$

## Theorem (Quasi-Weierstraß form)

If (1) is regular, then there exist invertible matrices  $S, T \in \mathbb{R}^{n \times n}$ :

$$SET = \begin{pmatrix} I & 0 \\ 0 & N \end{pmatrix}, \quad SAT = \begin{pmatrix} J & 0 \\ 0 & I \end{pmatrix},$$

where  $N, J$  are square matrices and  $N$  is nilpotent.

$$A^d := T \begin{pmatrix} J & 0 \\ 0 & 0 \end{pmatrix} T^{-1} \quad \Pi_{(E,A)} := T \begin{pmatrix} I & 0 \\ 0 & 0 \end{pmatrix} T^{-1}.$$

The solution of (1) with  $x(0) = x_0 \in C_{(E,A)}$ , is also a solution of

$$\dot{x} = A^d x.$$

We consider

$$E_{\sigma(t)}\dot{x} = A_{\sigma(t)}x. \quad (2)$$

We consider

$$E_{\sigma(t)}\dot{x} = A_{\sigma(t)}x. \quad (2)$$

It would be nice to rewrite (2) as

$$\dot{x} = A_{\sigma}^d x.$$

We consider

$$E_{\sigma(t)}\dot{x} = A_{\sigma(t)}x. \quad (2)$$

It would be nice to rewrite (2) as

$$\dot{x} = A_{\sigma}^d x.$$

But  $C_{(E_i, A_i)} \neq C_{(E_j, A_j)}$ !

We consider

$$E_{\sigma(t)} \dot{x} = A_{\sigma(t)} x. \quad (2)$$

It would be nice to rewrite (2) as

$$\dot{x} = A_{\sigma}^d x.$$

But  $C_{(E_i, A_i)} \neq C_{(E_j, A_j)}$ !

Let us view (2) as a time-variant DAE

$$E(t) \dot{x} = A(t) x,$$

Solution of (2) (Trenn, 2009):

$$x(t) = e^{A_{r_i}^d(t-t_i)} \Pi_{r_i} \cdot e^{A_{r_{i-1}}^d(t_i-t_{i-1})} \Pi_{r_{i-1}} \cdots e^{A_{r_1}^d(t_1-t_0)} \Pi_{r_1} x_0, \quad (3)$$

# Asymptotic stability and stabilization

$$E(t)\dot{x} = A(t)x, \quad (4)$$

## Definition (Trenn, 2009)

The zero solution of (4) is called **globally attractive** if for all initial conditions  $x(0) = x_0$  the corresponding solutions of (4), does not contain Dirac impulses and its derivatives and converge to zero when  $t \rightarrow \infty$ .

The zero solution of (4) is called **globally asymptotically stable (GAS)** if it is globally attractive and Lyapunov stable.

## Definition

The switched system

$$E_{\sigma(t)}\dot{x}(t) = A_{\sigma(t)}x(t)$$

is called **stabilizable via time-dependent switching** if there exists a piecewise continuous switching signal  $\sigma : \mathbb{R}_+ \rightarrow \mathcal{I}$  such that its equilibrium is GAS.



$$\dot{x} = A_i^\varepsilon x$$

with system matrix

$$A_i^\varepsilon := A_i^d \Pi_i - \frac{1}{\varepsilon} (I - \Pi_i) = T_i \begin{pmatrix} J_i & 0 \\ 0 & -\frac{1}{\varepsilon} I \end{pmatrix} T_i^{-1}.$$

For the set of system matrices  $A_i^\varepsilon$  we define the switched linear ODE:

$$\dot{x} = A_{\sigma(t)}^\varepsilon x \tag{5}$$

For all  $t > 0$  and  $x_0 \in \mathbb{R}^n$  it holds

$$(e^{A_i^d t} \Pi_i - e^{A_i^\varepsilon t}) x_0 = e^{-\frac{t}{\varepsilon}} (I - \Pi_i) x_0.$$

# Criterion of stabilizability via switching

## Theorem (Criterion for stabilizability of a switched DAE)

The following statements are equivalent:

- 1 The switched linear DAE (2) is stabilizable via a time-dependent switching signal.
- 2 The switched linear DAE (2) is stabilizable via the periodic switching signal  $\sigma_p$ .
- 3 There exists an  $\varepsilon_0 > 0$  so that the switched ODE (5) is stabilizable via the (same) periodic switching signal  $\sigma_p$  for all  $0 < \varepsilon < \varepsilon_0$ , uniformly w.r.t.  $\varepsilon$ :

$$\exists \mathbf{s} > \mathbf{0} : \forall \varepsilon \in (0, \varepsilon_0) \Rightarrow |\phi_\varepsilon(\mathbf{s}, \mathbf{x}_0, \sigma_p)| \leq \frac{1}{2} |\mathbf{x}_0|, \forall \mathbf{x}_0 \in \mathbb{R}^n.$$

# Criterion of stabilizability via switching

## Theorem (Criterion for stabilizability of a switched DAE)

*The following statements are equivalent:*

- 1 *The switched linear DAE (2) is stabilizable via a time-dependent switching signal.*
- 2 *The switched linear DAE (2) is stabilizable via the periodic switching signal  $\sigma_p$ .*
- 3 *There exists an  $\varepsilon_0 > 0$  so that the switched ODE (5) is stabilizable via the (same) periodic switching signal  $\sigma_p$  for all  $0 < \varepsilon < \varepsilon_0$ , uniformly w.r.t.  $\varepsilon$ :*

$$\exists \mathbf{s} > \mathbf{0} : \forall \varepsilon \in (0, \varepsilon_0) \Rightarrow |\phi_\varepsilon(\mathbf{s}, \mathbf{x}_0, \sigma_p)| \leq \frac{1}{2} |\mathbf{x}_0|, \forall \mathbf{x}_0 \in \mathbb{R}^n.$$

## Lemma

*Let  $A_i^d, i = 1, \dots, m$  commute pairwise. If (5) is stabilizable via the periodic switching signal  $\sigma_p$  for a certain  $\varepsilon_0$ , then it is stabilizable via the same switching signal  $\sigma_p$ , uniformly w.r.t.  $\varepsilon \in (0, \varepsilon_0)$ .*

# Tightness of the above criterion

Consider the system  $\Sigma_1 = (E_1, A_1)$  with

$$E_1 := \begin{pmatrix} 1 & -1 \\ 0 & 0 \end{pmatrix} \quad A_1 := \begin{pmatrix} 1 & -1 \\ 1 & 0 \end{pmatrix}$$

and the system  $\Sigma_2 = (E_2, A_2)$  with

$$E_2 := \begin{pmatrix} 1 & 1 \\ 0 & 0 \end{pmatrix} \quad A_2 := \begin{pmatrix} 1 & 1 \\ 0 & -1 \end{pmatrix}.$$

Their flow matrices and consistency projectors are as follows:

$$\Pi_1 = A_1^d = \begin{pmatrix} 0 & 0 \\ -1 & 1 \end{pmatrix}.$$

and

$$\Pi_2 = A_2^d = \begin{pmatrix} 1 & 1 \\ 0 & 0 \end{pmatrix}$$

$$\Pi_1 = A_1^d = \begin{pmatrix} 0 & 0 \\ -1 & 1 \end{pmatrix} \quad \Pi_2 = A_2^d = \begin{pmatrix} 1 & 1 \\ 0 & 0 \end{pmatrix}.$$

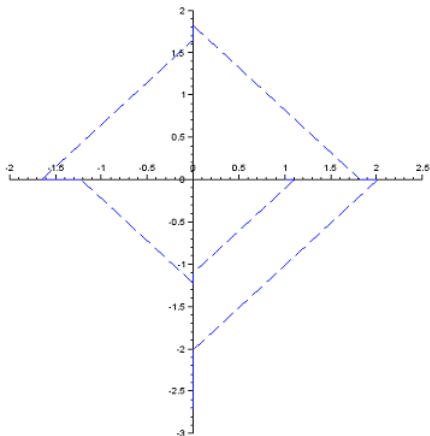


Figure : Typical trajectory of above switched DAE for  $x_0 = (1, 0)^T$

Now consider the corresponding approximations of the form (5)

$$A_1^\varepsilon = A_1^d \Pi_1 - \frac{1}{\varepsilon}(I - \Pi_1) = \begin{pmatrix} -\frac{1}{\varepsilon} & 0 \\ -1 - \frac{1}{\varepsilon} & 1 \end{pmatrix}$$

and

$$A_2^\varepsilon = A_2^d \Pi_2 - \frac{1}{\varepsilon}(I - \Pi_2) = \begin{pmatrix} 1 & 1 + \frac{1}{\varepsilon} \\ 0 & -\frac{1}{\varepsilon} \end{pmatrix}.$$

Consider the periodic signal  $\sigma_\varepsilon$  of a period  $2\varepsilon$ , defined by

$$\sigma_\varepsilon(t) = \begin{cases} 1, & t \in [0, \varepsilon), \\ 2, & t \in [\varepsilon, 2\varepsilon). \end{cases}$$

$$M_\varepsilon := e^{A_2^\varepsilon \varepsilon} e^{A_1^\varepsilon \varepsilon} = \begin{pmatrix} e^{\varepsilon-1} - (e^\varepsilon - e^{-1})^2 & e^\varepsilon (e^\varepsilon - e^{-1}) \\ -e^{-1} (e^\varepsilon - e^{-1}) & e^{\varepsilon-1} \end{pmatrix}.$$

The state of the system (5) at time  $2\varepsilon k$ , corresponding to  $\sigma_\varepsilon$  is given by

$$\phi_{eps}(2\varepsilon k, x_0) = M_\varepsilon^k x_0.$$

Define  $y(k) := \phi_{eps}(k2\varepsilon, x_0)$ . Then we obtain a discrete system

$$y(k) = M_\varepsilon y(k-1).$$

One can easily compute, that  $\rho(M_0) < 1$ .

## Theorem

*Assume there exist  $\varepsilon_0 > 0$  and  $s > 0$  so that for all  $0 < \varepsilon < \varepsilon_0$  there exists a periodic switching signal  $\sigma_\varepsilon$  with period  $s$  such that*

$$|\phi_\varepsilon(\mathbf{s}, \mathbf{x}_0, \sigma_\varepsilon)| \leq \frac{1}{2} |\mathbf{x}_0|.$$

*Moreover, assume there exists  $t_d > 0$  such that for all  $\varepsilon \in (0, \varepsilon_0)$ , for any two subsequent switches of  $\sigma_\varepsilon$  it holds  $|t_i^\varepsilon - t_{i+1}^\varepsilon| \geq t_d$ . Then (2) is stabilizable via  $\sigma_{\varepsilon^*}$  for some  $\varepsilon^* \in (0, \varepsilon_0)$ .*



# Stabilization via Projections

Let  $I$  be an index set. Denote  $S := \{S_i\}_{i \in I}$  and define

$$Pr(S) := \{S_{i_1} \cdots S_{i_r} : \{i_1, \dots, i_r\} \subset I\}.$$

Define  $S_\Pi := \{\Pi_1, \dots, \Pi_m\}$ . We call (2) stabilizable via projections, if  $\exists R \in Pr(S_\Pi)$  with  $\rho(R) < 1$ .

## Proposition

If (2) is stabilizable via projections, then for all  $\tau > 0$  and all  $\delta \in (0, 1)$  there exists a  $\tau$ -periodic stabilizer  $\sigma_\tau$  of system (2), so that the trajectories of (2) satisfy

$$|\phi(\tau, x_0, \sigma_\tau)| \leq \delta |x_0|, \quad \forall x_0 \in \mathbb{R}^n. \quad (6)$$

$$E_{\sigma(t)}\dot{x}(t) = A_{\sigma(t)}x(t)$$

## Theorem (Liberzon, Trenn, Wirth, 2011)

*Let  $i \neq j$  and  $A_i$  and  $A_j$  are invertible. The following conditions are equivalent:*

- 1  $[\Phi_i(t), \Phi_j(s)] = 0$  for all  $t, s \geq 0$
- 2  $[A_i^d, A_j^d] = 0$

*Both of them imply  $[\Pi_i, \Pi_j] = 0$  as well as  $[A_i^d, \Pi_j] = 0$ .*

$$E_{\sigma(t)} \dot{x}(t) = A_{\sigma(t)} x(t) \quad (7)$$

Define  $C := \bigcap_{i=1}^n C_{(E_i, A_i)}$ .

One can show that  $e^{A_i^d t} C \subset C$ .

## Proposition

Let  $[\Phi_i, \Phi_j] = 0$  for all  $i, j$ . System (7) is stabilizable via time-dependent switching signal iff

$$\dot{x} = \tilde{A}_{\sigma}^d x, \quad x(t) \in C$$

is stabilizable via time-dependent switching signal.

## What we have done

- Criterion of stabilizability of a switched DAE in terms of ODE approximations
- Conditions for stabilizability of switched DAEs via projections.
- Criterion for stabilizability of DAEs with commutative vector fields.

## What we are going to do

- Stabilization of DAEs via state-dependent switching
  - 1 Lyapunov-type conditions for stabilization
  - 2 Quadratic stabilization
- Connections between state-dependent and time-dependent stabilization.