

# Lyapunov small-gain theorems for not necessarily ISS hybrid systems

**Andrii Mironchenko**, Guosong Yang and Daniel Liberzon

Institute of Mathematics  
University of Würzburg

Coordinated Science Laboratory  
University of Illinois at Urbana-Champaign

MTNS 2014  
Groningen, 9 July 2014

$$\begin{aligned} \dot{x} &\in f(x, u), & (x, u) &\in C, \\ x^+ &\in g(x, u), & (x, u) &\in D. \end{aligned} \tag{\Sigma}$$

- $E \subset \mathbb{R}_+ \times \mathbb{N}$  is a **compact hybrid time domain** if

$$E = \bigcup_{j=0}^J ([t_j, t_{j+1}], j)$$

for some  $0 = t_0 \leq t_1 \leq \dots \leq t_{J+1}$ .



- $E \subset \mathbb{R}_+ \times \mathbb{N}$  is a **hybrid time domain** if  $\forall (T, J) \in E$ ,  $E \cap ([0, T] \times \{0, 1, \dots, J\})$  is a compact hybrid time domain.
- We are looking for **solution pairs**  $(x, u)$ .

# Comparison functions

$\mathcal{K}_\infty := \{\gamma : \mathbb{R}_+ \rightarrow \mathbb{R}_+ \mid \gamma(0) = 0, \gamma \text{ is continuous, increasing and unbounded}\}$

$\mathcal{L} := \{\gamma : \mathbb{R}_+ \rightarrow \mathbb{R}_+ \mid \gamma \text{ is continuous, strictly decreasing and } \lim_{t \rightarrow \infty} \gamma(t) = 0\}$

$\mathcal{KL} := \{\beta : \mathbb{R}_+ \times \mathbb{R}_+ \rightarrow \mathbb{R}_+ \mid \beta(\cdot, t) \in \mathcal{K}, \forall t \geq 0, \beta(r, \cdot) \in \mathcal{L}, \forall r > 0\}$



## Definition (ISS)

A set of solution pairs  $\mathcal{S}$  is **pre-ISS w.r.t.  $\mathcal{A}$**   $\Leftrightarrow \exists \beta \in \mathcal{KL}, \gamma \in \mathcal{K}_\infty$ :  
 $\forall (x, u) \in \mathcal{S}, \forall (t, j) \in \text{dom } x$

$$|x(t, j)|_{\mathcal{A}} \leq \max \{ \beta(|x(0, 0)|_{\mathcal{A}}, t + j), \gamma(\|u\|_{(t, j)}) \}.$$

- $\Sigma$  is **pre-ISS w.r.t.  $\mathcal{A}$**  if  $\mathcal{S} = \{ \text{all solution pairs } (x, u) \text{ of } \Sigma \}$  is pre-ISS w.r.t.  $\mathcal{A}$ .
- $\Sigma$  is **ISS w.r.t.  $\mathcal{A}$**  if  $\Sigma$  is pre-ISS w.r.t.  $\mathcal{A}$  and all solution pairs are complete.

## Definition

$V$  is **exponential ISS-LF w.r.t.  $\mathcal{A} \subset X$**   $:\Leftrightarrow \exists \psi_1, \psi_2 \in \mathcal{K}_\infty, c, d \in \mathbb{R}$ :

- $\psi_1(|x|_{\mathcal{A}}) \leq V(x) \leq \psi_2(|x|_{\mathcal{A}}) \quad \forall x \in X$

- $V(x) \geq \chi(|u|) \Rightarrow \begin{cases} \dot{V}(x; y) \leq -cV(x) & \forall (x, u) \in C, y \in f(x, u), \\ V(y) \leq e^{-d}V(x) & \forall (x, u) \in D, y \in g(x, u). \end{cases}$

## Definition

$V$  is **exponential ISS-LF w.r.t.  $\mathcal{A} \subset X$**   $:\Leftrightarrow \exists \psi_1, \psi_2 \in \mathcal{K}_\infty, c, d \in \mathbb{R}$ :

- $\psi_1(|x|_{\mathcal{A}}) \leq V(x) \leq \psi_2(|x|_{\mathcal{A}}) \quad \forall x \in X$

- $V(x) \geq \chi(|u|) \Rightarrow \begin{cases} \dot{V}(x; y) \leq -cV(x) & \forall (x, u) \in C, y \in f(x, u), \\ V(y) \leq e^{-d}V(x) & \forall (x, u) \in D, y \in g(x, u). \end{cases}$

## Proposition

Let  $V$  be exp. ISS-LF for  $\Sigma$  w.r.t.  $\mathcal{A}$  with  $d \neq 0$ .  $\forall \mu \geq 1, \forall \eta, \lambda > 0$ ,

$\mathcal{S}[\eta, \lambda, \mu] :=$  set of solution pairs  $(x, u)$  satisfying

$$-(d - \eta)(j - i) - (c - \lambda)(t - s) \leq \mu \quad \forall (t, j), (s, i) \in \text{dom } x.$$

Then  $\mathcal{S}[\eta, \lambda, \mu]$  is **pre-ISS w.r.t.  $\mathcal{A}$** .

$$\Sigma : \begin{cases} \Sigma_i : \dot{x}_i \in f_i(x, u), & (x, u) \in C, \\ x_i^+ \in g_i(x, u), & (x, u) \in D, \\ i = 1, \dots, n \end{cases}$$

## Definition

$V_i : X_i \rightarrow \mathbb{R}_+$  is **exponential ISS LF** for  $\Sigma_i$  w.r.t.  $\mathcal{A}_i \subset X_i$   $:\Leftrightarrow$

1)  $\exists \chi_{ij}, \chi_i \in \mathcal{K}, c_i, d_i \in \mathbb{R}: \quad \forall (x, u) \in C, \forall y_i \in f_i(x, u),$

$$V_i(x_i) \geq \max \left\{ \max_{j=1, j \neq i}^n \chi_{ij}(V_j(x_j)), \chi_i(|u|) \right\} \Rightarrow \dot{V}_i(x_i; y_i) \leq -c_i(V_i(x_i)).$$

2)  $\exists d_i \in \mathbb{R}: \quad \forall (x, u) \in D, \forall y_i \in g_i(x, u)$

$$V_i(y_i) \leq \max \left\{ e^{-d_i} V_i(x_i), \max_{j=1, j \neq i}^n \chi_{ij}(V_j(x_j)), \chi_i(|u|) \right\}.$$

- D. Liberzon, D. Nesic, A. Teel. Lyapunov-Based Small-Gain Theorems for Hybrid Systems, IEEE TAC, 2014.
- D. Liberzon, D. Nesic, A. Teel. Small-gain theorems of LaSalle type for hybrid systems, CDC 2012.
- Small-gain theorems for interconnections of 2 ISS systems
- Modification method for interconnections with not necessarily ISS subsystems.
- LaSalle-Krasovskii type theorem for hybrid systems



- D. Liberzon, D. Nescic, A. Teel. Lyapunov-Based Small-Gain Theorems for Hybrid Systems, IEEE TAC, 2014.
  - D. Liberzon, D. Nescic, A. Teel. Small-gain theorems of LaSalle type for hybrid systems, CDC 2012.
  - Small-gain theorems for interconnections of 2 ISS systems
  - Modification method for interconnections with not necessarily ISS subsystems.
  - LaSalle-Krasovskii type theorem for hybrid systems
- 
- S. Dashkovskiy, A. Mironchenko. Input-to-State Stability of Nonlinear Impulsive Systems, SICON, 2013.
  - S. Dashkovskiy, M. Kosmykov, A. Mironchenko, L. Naujok. Stability of interconnected impulsive systems with and without time delays, using Lyapunov methods, Nonlinear Analysis: Hybrid Systems, 2012.
  - Small-gain theorems for interconnections of  $n$  impulsive systems with matched instabilities.
  - Stability conditions for nonexponential Lyapunov functions

- D. Liberzon, D. Nesić, A. Teel. Lyapunov-Based Small-Gain Theorems for Hybrid Systems, IEEE TAC, 2014.
  - D. Liberzon, D. Nesić, A. Teel. Small-gain theorems of LaSalle type for hybrid systems, CDC 2012.
  - Small-gain theorems for interconnections of 2 ISS systems
  - Modification method for interconnections with not necessarily ISS subsystems.
  - LaSalle-Krasovskii type theorem for hybrid systems
- 
- S. Dashkovskiy, A. Mironchenko. Input-to-State Stability of Nonlinear Impulsive Systems, SICON, 2013.
  - S. Dashkovskiy, M. Kosmykov, A. Mironchenko, L. Naujok. Stability of interconnected impulsive systems with and without time delays, using Lyapunov methods, Nonlinear Analysis: Hybrid Systems, 2012.
  - Small-gain theorems for interconnections of  $n$  impulsive systems with matched instabilities.
  - Stability conditions for nonexponential Lyapunov functions

## ISS-LF for $\Sigma_i$

$V_i : X_i \rightarrow \mathbb{R}_+$  is **ISS-Lyapunov functions** for  $\Sigma_i$ ,  $i = 1, 2$  iff

- $\forall (x, u) \in C, \forall y_1 \in f_1(x, u)$   
 $V_1(x_1) \geq \max \{ \chi_{12}(V_2(x_2)), \chi_1(|u|_U) \} \Rightarrow \dot{V}_1(x_1; y_1) \leq -c_1 V_1(x_1),$
- $\forall (x, u) \in D, \forall y_1 \in g_1(x, u)$   
 $V_1(y_1) \leq \max \{ e^{-d_1} V_1(x_1), \chi_{12}(V_2(x_2)), \chi_1(|u|) \}.$
  
- $\forall (x, u) \in C, \forall y_2 \in f_2(x, u)$   
 $V_2(x_2) \geq \max \{ \chi_{21}(V_1(x_1)), \chi_2(|u|_U) \} \Rightarrow \dot{V}_2(x_2) \leq -c_2 V_2(x_2),$
- $\forall (x, u) \in D, \forall y_2 \in g_2(x, u)$   
 $V_2(y_2) \leq \max \{ e^{-d_2} V_2(x_2), \chi_{21}(V_1(x_1)), \chi_2(|u|) \}.$

## ISS-LF for $\Sigma_i$

$V_i : X_i \rightarrow \mathbb{R}_+$  is **ISS-Lyapunov functions** for  $\Sigma_i$ ,  $i = 1, 2$  iff

- $\forall (x, u) \in C, \forall y_1 \in f_1(x, u)$   
 $V_1(x_1) \geq \max \{ \chi_{12}(V_2(x_2)), \chi_1(|u|) \} \Rightarrow \dot{V}_1(x_1; y_1) \leq -c_1 V_1(x_1),$
- $\forall (x, u) \in D, \forall y_1 \in g_1(x, u)$   
 $V_1(y_1) \leq \max \{ e^{-d_1} V_1(x_1), \chi_{12}(V_2(x_2)), \chi_1(|u|) \}.$
- $\forall (x, u) \in C, \forall y_2 \in f_2(x, u)$   
 $V_2(x_2) \geq \max \{ \chi_{21}(V_1(x_1)), \chi_2(|u|) \} \Rightarrow \dot{V}_2(x_2) \leq -c_2 V_2(x_2),$
- $\forall (x, u) \in D, \forall y_2 \in g_2(x, u)$   
 $V_2(y_2) \leq \max \{ e^{-d_2} V_2(x_2), \chi_{21}(V_1(x_1)), \chi_2(|u|) \}.$

**How to use these two LFs to study ISS of the interconnection?**

## ISS-LF for $\Sigma_i$

$V_i : X_i \rightarrow \mathbb{R}_+$  is **ISS-Lyapunov functions** for  $\Sigma_i$ ,  $i = 1, 2$  iff

- $\forall (x, u) \in C, \forall y_1 \in f_1(x, u)$   
 $V_1(x_1) \geq \max \{ \chi_{12}(V_2(x_2)), \chi_1(|u|) \} \Rightarrow \dot{V}_1(x_1; y_1) \leq -c_1 V_1(x_1),$
- $\forall (x, u) \in D, \forall y_1 \in g_1(x, u)$   
 $V_1(y_1) \leq \max \{ e^{-d_1} V_1(x_1), \chi_{12}(V_2(x_2)), \chi_1(|u|) \}.$
- $\forall (x, u) \in C, \forall y_2 \in f_2(x, u)$   
 $V_2(x_2) \geq \max \{ \chi_{21}(V_1(x_1)), \chi_2(|u|) \} \Rightarrow \dot{V}_2(x_2) \leq -c_2 V_2(x_2),$
- $\forall (x, u) \in D, \forall y_2 \in g_2(x, u)$   
 $V_2(y_2) \leq \max \{ e^{-d_2} V_2(x_2), \chi_{21}(V_1(x_1)), \chi_2(|u|) \}.$

**This depends on  $\chi_{12}, \chi_{21}$  and coefficients  $c_i, d_i!$**

# The case when $c_i > 0, d_i > 0, i = 1, 2$

Theorem (Liberzon, Netic, Teel, IEEE TAC, 2014)

Let  $V_1, V_2$  be ISS-Lyapunov function for  $\Sigma_1, \Sigma_2$  with gains  $\chi_{12}, \chi_{21}$ . Let also  $c_1, c_2, d_1, d_2 > 0$ . Then

$$\chi_{12} \circ \chi_{21} < id \quad (\text{SGC})$$

$\Rightarrow$

- $\Sigma$  is ISS.
- $V(x) := \max\{V_1(x_1), \rho(V_2(x_2))\}$  is an ISS Lyapunov function for  $\Sigma$ .

# The case when $c_i > 0, d_i > 0, i = 1, 2$

Theorem (Liberzon, Netic, Teel, IEEE TAC, 2014)

Let  $V_1, V_2$  be ISS-Lyapunov function for  $\Sigma_1, \Sigma_2$  with gains  $\chi_{12}, \chi_{21}$ . Let also  $c_1, c_2, d_1, d_2 > 0$ . Then

$$\chi_{12} \circ \chi_{21} < id \quad (\text{SGC})$$

$\Rightarrow$

- $\Sigma$  is ISS.
- $V(x) := \max\{V_1(x_1), \rho(V_2(x_2))\}$  is an ISS Lyapunov function for  $\Sigma$ .

If  $\chi_{ij}$  are linear,  $\rho$  can be chosen linear and s.t.  $V$  is an exponential LF.

# The case when $c_i > 0, d_i > 0, i = 1, 2$

Theorem (Liberzon, Netic, Teel, IEEE TAC, 2014)

Let  $V_1, V_2$  be ISS-Lyapunov function for  $\Sigma_1, \Sigma_2$  with gains  $\chi_{12}, \chi_{21}$ . Let also  $c_1, c_2, d_1, d_2 > 0$ . Then

$$\chi_{12} \circ \chi_{21} < id \quad (\text{SGC})$$

$\Rightarrow$

- $\Sigma$  is ISS.
- $V(x) := \max\{V_1(x_1), \rho(V_2(x_2))\}$  is an ISS Lyapunov function for  $\Sigma$ .


If  $\chi_{ij}$  are linear,  $\rho$  can be chosen linear and s.t.  $V$  is an exponential LF.

What to do if some of  $c_i, d_i$  are  $< 0$ ?



# Modification of "bad" subsystems when $\chi_{ij}$ are linear

Method due to Liberzon, Nesic, Teel, IEEE TAC, 2014.

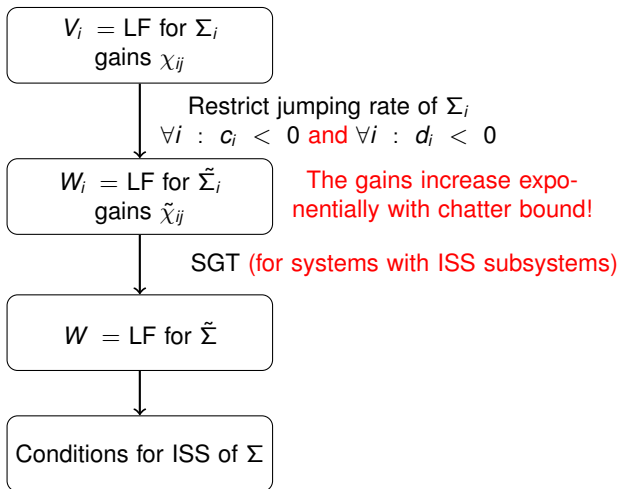

# A new small-gain theorem

Define  $\Gamma_M := (\chi_{ij})_{n \times n}$ .

## Theorem

Let  $V_i$  be exp. ISS LF for  $\Sigma_i$  w.r.t.  $\mathcal{A}_i$  with  $d_i \neq 0$  and linear gains  $\chi_{ij}$ .

$$\rho(\Gamma_M) < 1 \quad \Rightarrow \quad V(x) := \max_{i=1}^n \frac{1}{s_i} V_i(x_i)$$

is an exp. ISS LF for  $\Sigma$  w.r.t.  $\mathcal{A} = \mathcal{A}_1 \times \dots \times \mathcal{A}_n$  with rate coefficients

$$c := \min_{i=1}^n c_i, \quad d := \min_{i,j:j \neq i} \left\{ d_i, -\ln \left( \frac{s_j}{s_i} \chi_{ij} \right) \right\}.$$

This LF can be used to prove ISS if all  $c_i > 0$  or all  $d_i > 0$ .

# A new small-gain theorem

Define  $\Gamma_M := (\chi_{ij})_{n \times n}$ .

## Theorem

Let  $V_i$  be exp. ISS LF for  $\Sigma_i$  w.r.t.  $\mathcal{A}_i$  with  $d_i \neq 0$  and linear gains  $\chi_{ij}$ .

$$\rho(\Gamma_M) < 1 \quad \Rightarrow \quad V(x) := \max_{i=1}^n \frac{1}{s_i} V_i(x_i)$$


is an exp. ISS LF for  $\Sigma$  w.r.t.  $\mathcal{A} = \mathcal{A}_1 \times \dots \times \mathcal{A}_n$  with rate coefficients

$$c := \min_{i=1}^n c_i, \quad d := \min_{i,j:j \neq i} \left\{ d_i, -\ln \left( \frac{s_j}{s_i} \chi_{ij} \right) \right\}.$$

This LF can be used to prove ISS if all  $c_i > 0$  or all  $d_i > 0$ .

Properly modified theorem holds for nonlinear gains and nonexponential LFs for subsystems.

## Improved modification method

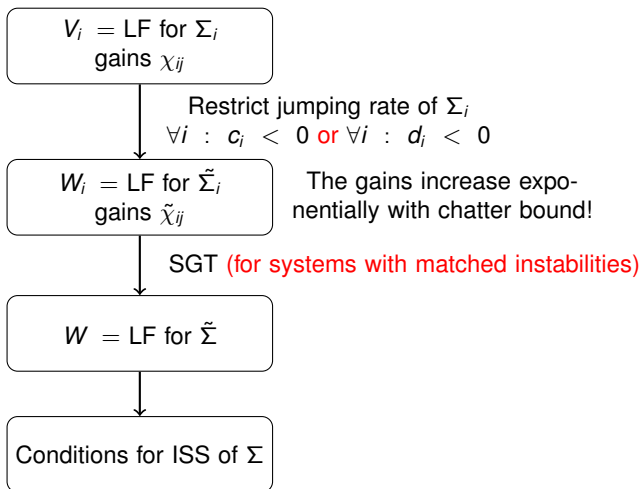

# Making discrete dynamics ISS

- Define  $I_d := \{i \in \{1, \dots, n\} : d_i < 0\}$ .
- For  $i \notin I_d$  we do not make any changes
- $\forall i \in I_d$  restrict the frequency of jumps of  $\Sigma_i$  by

$$j - k \leq \delta_i(t - s) + N_0^i, \quad (\text{ADT})$$

where  $\delta_i, N_0^i > 0$  and  $(t, j), (s, k) \in \text{dom } x$ .

- It can be modeled by the clock

$$\begin{aligned} \dot{\tau}_i &\in [0, \delta_i], & \tau_i &\in [0, N_0^i], \\ \tau_i^+ &= \tau_i - 1, & \tau_i &\in [1, N_0^i]. \end{aligned}$$

- $\tilde{\Sigma}_i$  is defined by  $z_i := (x_i, \tau_i)$  and

$$\tilde{f}_i(z, u) := \begin{bmatrix} f_i(x, u) \\ [0, \delta_i] \end{bmatrix}, \quad \tilde{g}_i(z, u) := \begin{bmatrix} g_i(x, u) \\ \{\tau_i - 1\} \end{bmatrix}$$

## Proposition: ISS LF for modified subsystems

$V_i$  is ISS-LF for  $\Sigma_i$  with gains  $\chi_{ij}$  and coefficients  $c_i, d_i$ .



$$W_i(z_i) := e^{L_i \tau_i} V_i(x_i)$$

is an ISS-LF for  $\tilde{\Sigma}_i$  with

$$\tilde{\chi}_{ij} := e^{L_i N_0^i} \chi_{ij}, \quad \tilde{d}_i = d_i + L_i, \quad \tilde{c}_i = c_i - L_i \delta_i.$$

# Example

Let  $c_1 > 0$ ,  $d_1 < 0$ ,  $c_2 > 0$  and  $d_2 < 0$ .

- Instabilities are matched  $\Rightarrow$  no modification.
- SGT  $\Rightarrow$  LF  $V$  for interconnection with  $c > 0$  and  $d < 0$ .

Let  $c_1 > 0$ ,  $d_1 < 0$ ,  $c_2 < 0$  and  $d_2 > 0$ .

- Instabilities are not matched  $\Rightarrow$  modify  $\Sigma_2$ .

$$\tilde{r} = \begin{bmatrix} 0 & \tilde{\chi}_{12} \\ \tilde{\chi}_{21} & 0 \end{bmatrix} = \begin{bmatrix} 0 & e^{L_1 N_0^1} \chi_{12} \\ \chi_{21} & 0 \end{bmatrix}.$$

- SGT  $\Rightarrow$

$$\chi_{12}\chi_{21} < e^{-L_1 N_0^1}.$$

- Since  $L_1 = -d_1 + \varepsilon$ ;  $N_0^1 \geq 1 \Rightarrow$

$$\chi_{12}\chi_{21} \leq e^{d_1}.$$

## Main results

- New small-gain theorem for hybrid systems.
- If instabilities are matched  $\Rightarrow$  no modification is needed.
- Less restrictive modification method

## Outlook

- Extension to nonlinear  $\chi_{ij}$ , using ideas from S. Dashkovskiy and A.M. Input-to-State Stability of Nonlinear Impulsive Systems, SICON, 2013.



## Main results

- New small-gain theorem for hybrid systems.
- If instabilities are matched  $\Rightarrow$  no modification is needed.
- Less restrictive modification method

## Outlook

- Extension to nonlinear  $\chi_{ij}$ , using ideas from S. Dashkovskiy and A.M. Input-to-State Stability of Nonlinear Impulsive Systems, SICON, 2013.
- **Can one avoid modifications if the instabilities are not matched?**

## Main results

- New small-gain theorem for hybrid systems.
- If instabilities are matched  $\Rightarrow$  no modification is needed.
- Less restrictive modification method

## Outlook

- Extension to nonlinear  $\chi_{ij}$ , using ideas from S. Dashkovskiy and A.M. Input-to-State Stability of Nonlinear Impulsive Systems, SICON, 2013.
- **Can one avoid modifications if the instabilities are not matched?**

Thank you for attention!